


TIPS & TRICKS

LOGICK50

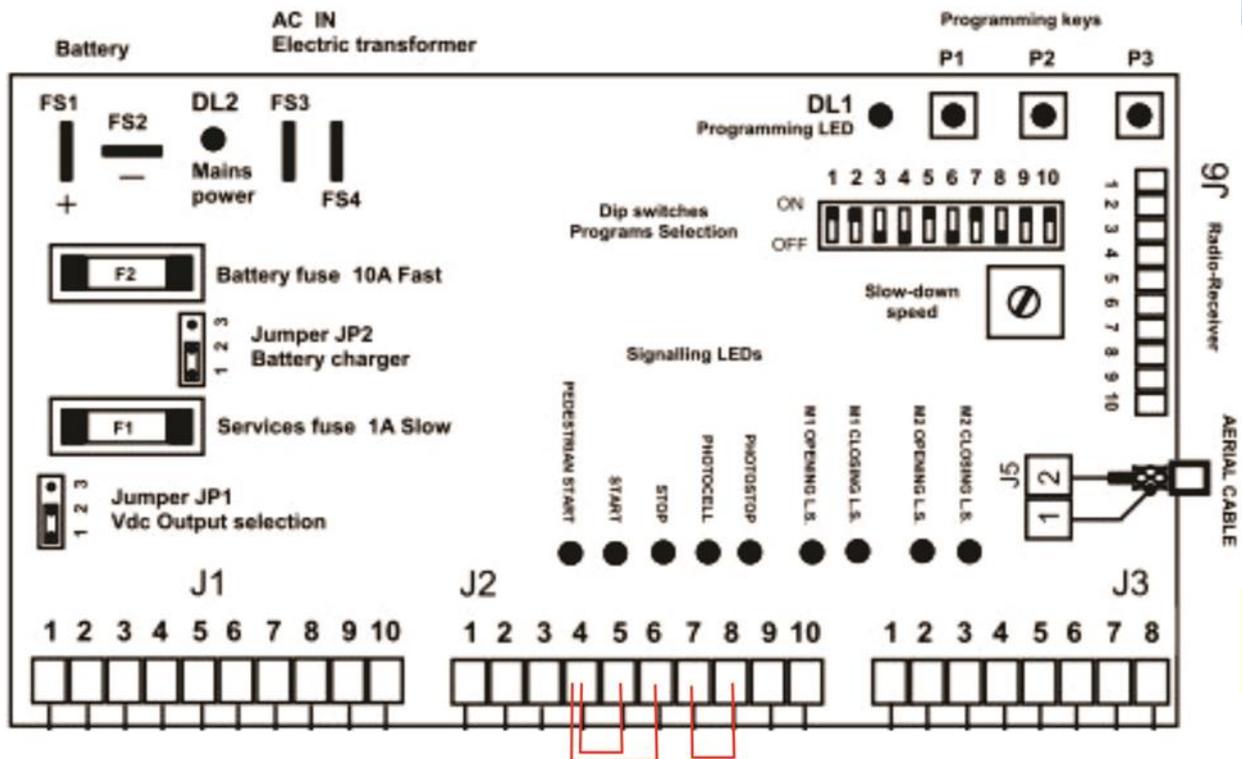

- **TIP** – You need to fit three small loops of wire to your safety inputs to make anything work. These need to be removed later if you install safety devices to these input terminals. But for now take three pieces of light gauge wire (speaker or telephone wire is good) about 40mm long and strip both ends 7mm. Insert them as above in J2 from 4 to 5, 4 to 6 and 7 to 8.
- **TIP** - Ensure JP1 & JP2 on the control board are set to the correct voltage for your system.
- **TIP** – A good starting setup for your dip switches on single gates is 3, 7 & 10 on – all others off.
- **TIP** – A good starting setup for your dip switches on double gates is 7 & 10 on – all others off.
- **TIP** – The manual offers both automatic programming and manual programming. Manual programming gives more control and is preferred by professional installers.